Technical Specifications

EVERTUFF™ EXTRUDED SQUARE BOLLARD

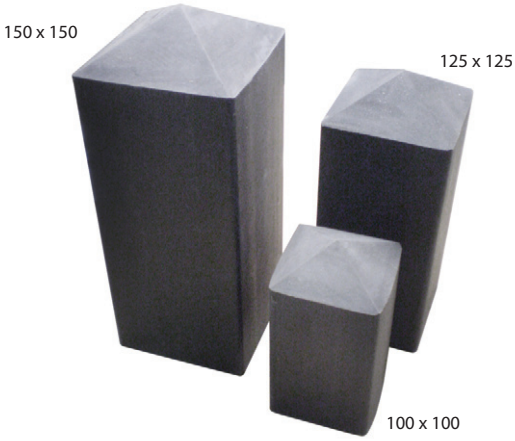

© Cosset Industries Australia Pty Ltd

Primary Application

Protect your assets, the look of your project and the environment with **Evertuff™ Square Bollards** from Cosset. They are easy to install and available in a range of options to suit any project. Rot free, rust free and vermin proof, **Evertuff™ Square Bollards** are a long term investment particularly in harsh conditions.

Suitable for deterring vehicle access, the recycled plastic bollard is extremely robust but, most importantly, unlike metal or wood alternatives, will remain robust for the life of the product. **Evertuff™ Square Bollards** will also retain their highly aesthetic appearance for their lifetime.

Features

- Recycled co-mingled material means timber-like strength with no warping.
- Order pre-cut to length and therefore no wastage.
- Drilled, planed and cut with the same tools as timber.
- Won't crack like concrete, rot like timber or rust like steel.
- Termite and white ant resistant to ensure longevity for your project.
- Superior life span with the advantage of retaining physical properties throughout entire product life.
- Non toxic – no chemicals like CCA treated timber.
- UV stabilised material guarantees longevity of product.
- Curved edges and protrusion free giving a safety first design.
- 98% recycled plastic and timber material means each metre of Evertuff™ prevents kilograms of rubbish entering landfill and thus organisations can reduce their environmental footprints.
- Non permeable – can be fully submerged in water.
- Will not harbour vermin.
- Smooth finish and consistent colouring – unlike moulded methods, extrusion allows for a smooth wood-like finish and is far more colour consistent.
- 8 x stronger than pure plastic recycled products.
- Has a thermal buffer and hence will not freeze over or get too hot to touch.

All about Extruded Profiles

Cosset's **Evertuff™ 98% Recycled Wood Plastic Composite Extruded Profiles** are a breakthrough for recycling and a win for reducing landfill. Using new technology, recycled plastic is compounded with waste wood and then continuously extruded through a die-cut profile – meaning it can be produced in any length up to 3000mm. The result is a far more cost effective and considerably stronger section than 100% recycled plastic alone.

Options

- Available in standard charcoal only
- Square cut top (ST) or pyramid top (PT)
- Hole for post & rail application
- Can be routed for an indentation
- In-ground sleeves available in all sizes, allowing the bollard to be removed

Models

Model Code
Refer to D Chart below
Bollard Dimensions
Refer to D Chart below
Bollard Top
Square top – ST
Pyramid top – PT
Bollard Length (BL)
Standard length is 1500mm
Bollard Hole (H)
Maximum rail O.D. 64mm
Add 'H' to model code.

Example :

Cosset-ES-**FB**-1500-ST
Cosset 100x100 square bollard, length 1500mm, square top

Example :

Cosset-ES-**PBH**-1500-PT
Cosset 125x125 square bollard, length 1500mm, pyramid top and hole for rail

D Chart

Model Code	Bollard Size (mm)	Weight (kg/m)
ES-FB	100x100	10.15
ES-PB	125x125	15.85
ES-GB	150x150	22.83

For a custom **Bollard** made specifically for your organisation please contact Cosset on 1800 COSSET

How To Specify :

COSSET - ES - FB - BL - PT

- COSSET: Manufacturer
- ES - FB: Model Code
- BL: Bollard Length
- PT: Bollard Top