

Technical Specifications

EVERTUFF™ PARKING AID / WHEEL STOP

COMPLIANT TO AUSTRALIAN STANDARD
AS/NZS 2890.1.2004

Primary Application

The aesthetically designed **Evertuff™** body of the **Parking Aid** will never crack exposing vehicles and pedestrians to jagged surfaces and exposed metal pins.

Whilst robust, the **Parking Aid** is lightweight and eliminates the requirement for lifting equipment as well as many OH&S factors allowing a single person to easily complete an installation.

The **Parking Aid** is designed to assist parking motorists in preventing costly damage to vehicles and surrounding infrastructure, namely other vehicles, walls, fences and buildings. Proven over many years in retail, public open space and industrial projects, the **Parking Aid** cost effectively completes any car park.

Features

- A one piece body means no cracks or rot for superior product longevity.
- The curved edges and protrusion free, safety first design reduces liability operators are exposed to.
- UV stabilised material guarantees longevity of product and product appearance.
- There are 3 attachment points using either a 12mm spike for bitumen installation or a 12mm dyna bolt for concrete. These can be supplied at additional cost.
- Less than 15kg per metre means no lifting gear is required. This has many OH&S benefits as well as faster installation.

All about Extruded Profiles

Cosset's **Evertuff™ 98% Recycled Wood Plastic Composite Extruded Profiles** are a breakthrough for recycling and a win for reducing landfill. Using new technology, recycled plastic is compounded with waste wood and then continuously extruded through a die-cut profile – meaning it can be produced in any length up to 3000mm. The result is a far more cost effective and considerably stronger section than 100% recycled plastic alone.

Options


- Reflectors can be added or any other custom touches you may require.
- Available in standard charcoal only.



© Cosset Industries Australia Pty Ltd



© Cosset Industries Australia Pty Ltd

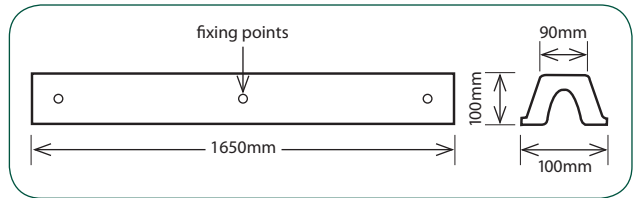

Models

Model Code (ES-PA)

Dimensions

Refer to D Chart below

Length (BL)

Standard Length is 1650mm

Example :

Cosset-ES-PA-1650
1650m of Evertuff™ Parking Aid


D Chart

Model Code	Height (mm)	Width (mm)	Max Section Length (mm)	Weight (kg/m)
ES-PA	100	100	3000	14.2

Fix to Concrete: 3 x M12mm x 125mm masonry anchor

Fix to Bitumen: 3 x 12mm x 345mm road spikes

How To Specify :

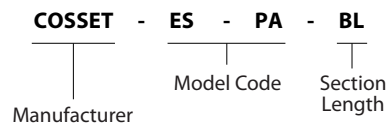

PARKING AID / WHEEL STOP